

Hanger

A special plate with 4 holes for tight and durable fastening, which can also be used to suspend the appliance from sloping ceilings.



Blades

For additional mechanical strength and durability over time, the blades with 180 cm (70") and 200 cm (80") are reinforced at the point of attachment to the motor.



Nordik ECO 120
#61060

Telenordik Eco
#21200



IR remote control, forward/reverse, 5 speeds, with wall bracket

Continuously variable wall regulator
POT-R #12829



Forward/reverse operation for surface-mounting and flush mounting

Differential temperature controller Vort Delta T WIFI
#21175

for fully automatic heat recirculation in winter



Receiver MD-WIFI
#21399

(1 is required for each fan)



25 YEARS
LIMITED MOTOR
WARRANTY




in 6 sizes with
Ø 92 to 200 cm
available!



- State-of-the-art, economical EC motor technology.
- Forward/reverse (summer/winter) function.
- Balanced motor and blades.
- Controlled¹ by optional IR-remote control **Telenordic Eco** or optional wall controller **POT-R**.
- Housing ABS white, RAL 9016 satin finished, blades steel, RAL 9016 satin-finished, powdercoated.
- Installation on sloped ceilings only with on-site construction.

Options:

- Longer downrods for high ceilings available (p. 144).

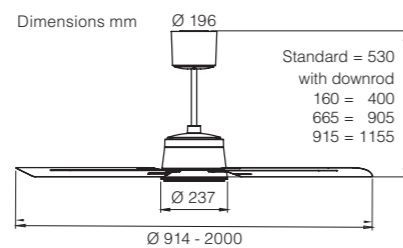

¹ Always order control unit separately
Cannot be operated without control unit!

No. of blades	3
Power motor (W)	2.7 - 40
Voltage (V/Hz)	220-240/50
Size Ø (cm/")	92-202/36-80
No. of speeds	stepless/5 ¹
Rev. max. (RPM)	200 - 250
Weight (kg)	5.5 - 10.0

Installation: 4 screws min. Ø 4.5 mm
separation □ 80 mm

Nordik Eco

Product	Code No.	W	U/min	m ² max.	Ø (mm)	Housing finish	Blade finish
ECO 90	61060	27	250	15	914	ABS White	White
ECO 120	61061	30	235	22	1218	ABS White	White
ECO 140	61062	30	235	32	1422	ABS White	White
ECO 160	61063	30	210	40	1524	ABS White	White
ECO 180	61064	40	205	46	1800	ABS White	White
ECO 200	61065	40	200	54	2000	ABS White	White

Downrods

in 3 different lengths:

Finish	Code No. 160 mm	Code No. 665 mm	Code No. 915 mm
White	21150	21154	21155